

Digital

Twin-Beam Infrared Photobeam Sensor

《Advanced twin Series》


LK-25HD / **LK-25HDF**(Outdoor 25m)

LK-40HD / **LK-40HDF**(Outdoor 40m)

LK-60HD / **LK-60HDF**(Outdoor 60m)

LK-80HD / **LK-80HDF**(Outdoor 80m)

(Standard version) / (Superior version)

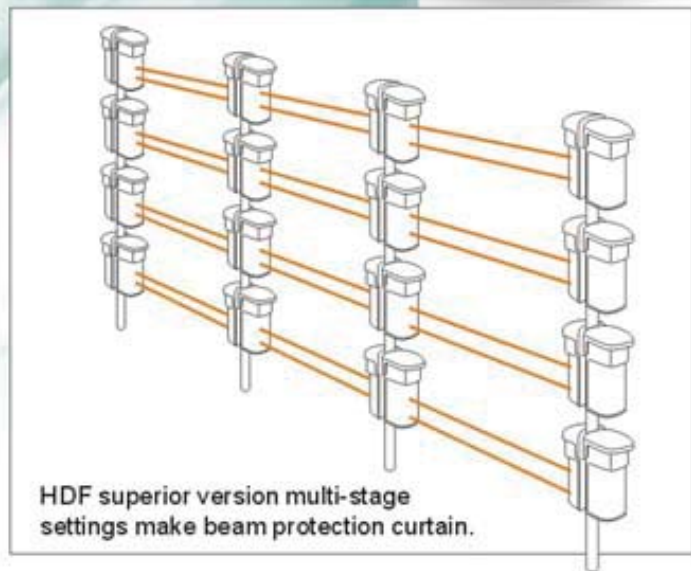

LED level meter for beam alignment. TWO LEDs on the receiver act as a level meter to visually display the beam reception level. Each LED changes flickers more quickly → flickers quickly → flickers slowly → turns off. 7-level LED indicator enables quick and accurate beam alignment.